

Create Imaging Association

What




By clicking the
create a new association.

button in the upper right-hand corner of the imaging association view, we can

When/Why

We'll create a new association every time we want to assign an image/driver pack to a device that doesn't have one. Each device can have one and only one imaging association.

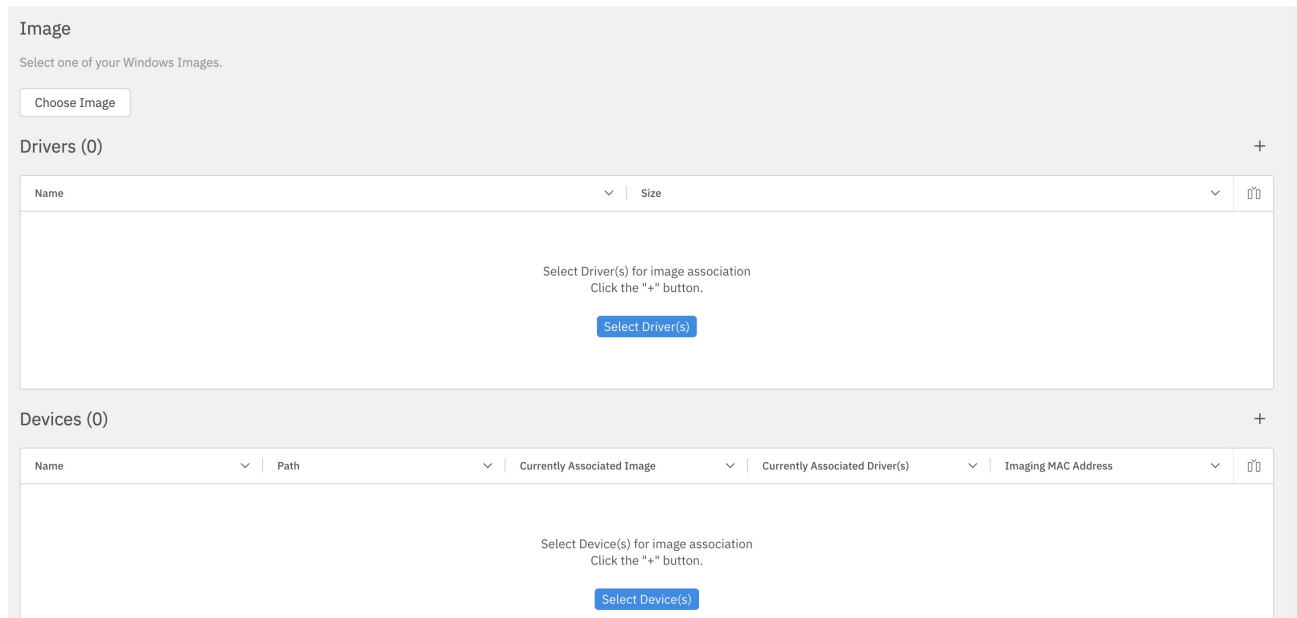


The screenshot shows the 'Imaging Association' interface. It has three main sections: 'Image', 'Drivers (0)', and 'Devices (0)'. The 'Image' section has a 'Choose Image' button. The 'Drivers (0)' section has a 'Select Driver(s)' button. The 'Devices (0)' section has a 'Select Device(s)' button. Each section has a table header with columns for Name, Path, Currently Associated Image, Currently Associated Driver(s), and Imaging MAC Address. The 'Drivers' and 'Devices' sections also have a '+', '-', and 'refresh' icon in the top right corner.

How

We'll choose the image to use from the "Choose Image" button shown above, the driver pack (optional) in the center, and the device(s) at the bottom. The process is shown in brief below:

Note: If you add an association for a device that already has one, you will be prompted for overwrite/cancel as follows:

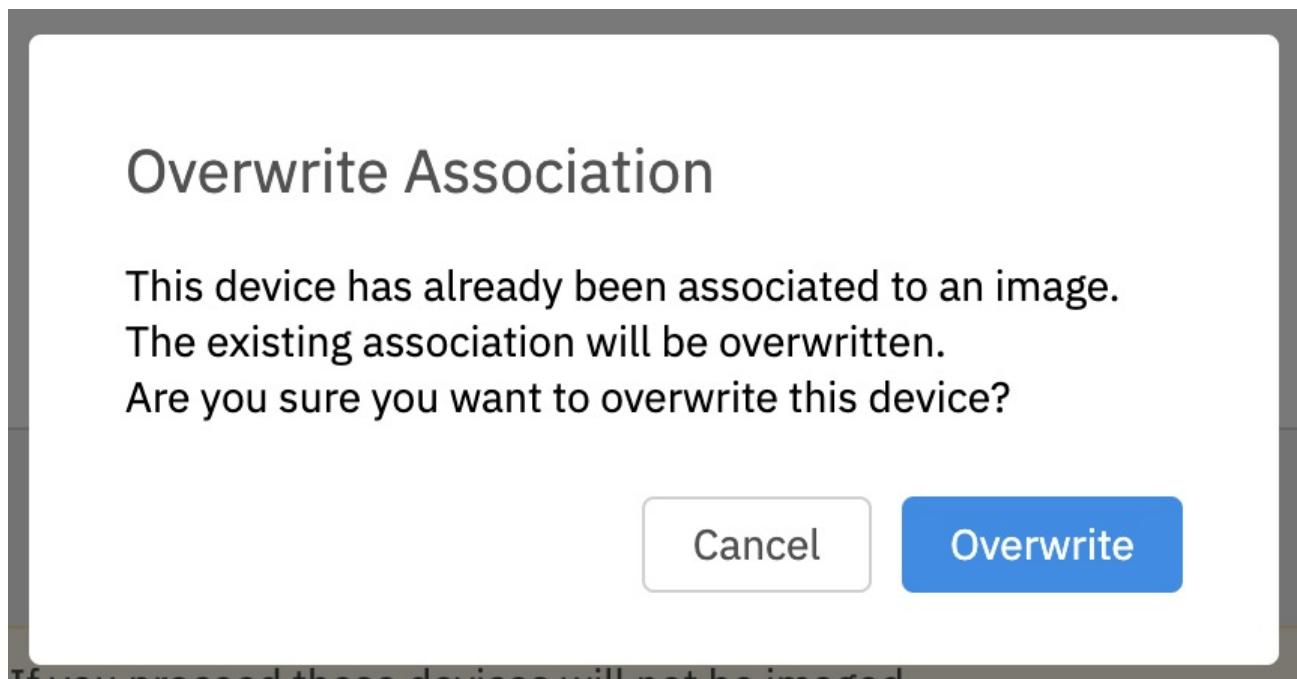

The dialog box is titled 'Overwrite Association'. It contains the text: 'This device has already been associated to an image. The existing association will be overwritten. Are you sure you want to overwrite this device?'. At the bottom, there are two buttons: 'Cancel' and 'Overwrite'.

If you proceed these devices will not be imaged

