


# Webmin GUI (On-Premise)

## Webmin GUI

For an on-premise installation of FileWave the Webmin GUI can help you set some options on the Debian operating system. Note that this does not exist for servers hosted by FileWave. It's especially important to set the root password as seen below.

For Webmin on Debian know that you will need to go to Webmin -> Webmin Configuration -> Operating System and Environment and make sure it's set to Debian 12.4 (Or whatever version we are at when you set up your system. You can see this with `cat /etc/debian_version` on the server.

1. At the login screen note the URL to remotely manage the server, ex: `https://myorg.filwave.net:10000`
  - If there is no IP address specified because DHCP is not available on the subnet for your FileWave Linux Appliance, login with the username "root" with password "filewave".
  - Run "nmtui" at the command prompt to launch the Network Manager Text UI so you can configure the networking for the FileWave VM appliance. You'll need to reload the IP stack with "service network restart". Skip the network configuration steps later in the Webmin.
2. Browse to this URL and log in with username "root" and password "filewave". We will change this password later.
3. Browse to Hardware > System Time on the left, pick the Change timezone tab on the right, pick your time zone and click Save. North American time zones all start with "America".
4. Switch to the Time server sync tab, enter "pool.ntp.org" in the Timeserver hostnames or addresses field, set Synchronize on schedule? to "Yes, at times below", and click the Sync and Apply button.
5. Go to System > Change Passwords on the left and select the "root" account on the right from the list of usernames. Enter a new root password, confirm it, and click Change. Note that this will change the default password for the root account used to log into the server from "filewave" to whatever you choose so enter a secure password that is easy for you to remember.
6. Choose Networking > Network Configuration on the left, and Network Interfaces on the right. Click the blue link labeled "ens160" or "ens32" for the Ethernet adapter. Change the IPv4 address settings to "Static configuration", enter a static IP, enter a subnet mask, and click Save and Apply at the bottom.
7. You will no longer be able to access the Webmin UI for the FileWave servers via its old DHCP IP address. Change the address in your browser's address bar to use the new static IP address for the FileWave server that you configured in the previous step. Browse to Networking > Network Configuration on the left, and Hostname and DNS Client on the right. Enter the IP address for your DNS server and click Save.
8. Select Networking > Network Configuration on the left, and Routing and Gateways on the right. Pick "ens160" or "ens32" from the Default routes pull-down, enter the default gateway address for the subnet the FileWave server is hosted on, and click Save.
9. Go to S\_ystem > Bootup and Shutdown\_ on the left, scroll to the bottom on the right, and click the Reboot System button. When asked to confirm if you want to reboot the system with "shutdown -r now" click the Reboot System button again.

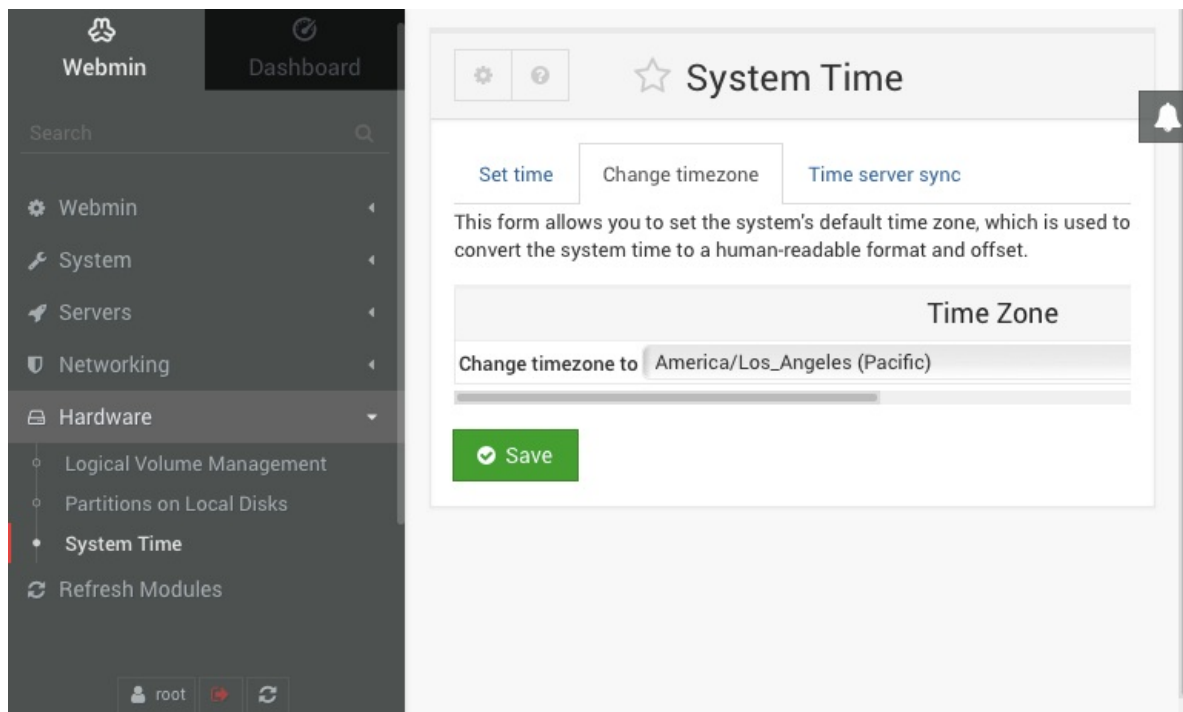

Webmin

Dashboard

Search

Webmin

System

Servers

Networking

Hardware

Logical Volume Management

Partitions on Local Disks

System Time

Cluster

Refresh Modules

root

System Time

Set timeChange timezoneTime server sync

This form is for configuring the system to automatically synchronize the time with a remote server. Synchronization will be done using the Unix `time` protocol or NTP, depending on which commands are installed and what the remote system supports.

Time Server

Timeserver hostnames or addresses

pool.ntp.org

☒ Set hardware time too

☐ Yes ☒ No

Synchronize when Webmin starts?

☐ No ☒ Yes, at times below ..

Minutes

Hours

Days

Months

Weekdays

☐ All ☒ Selected ..

☐ All ☒ Selected ..

☒ All ☐ Selected ..

☒ All ☐ Selected ..

☒ All ☐ Selected ..

0

1

2

3

4

5

6

7

8

9

10

12

13

14

15

16

17

18

19

20

21

22

24

25

26

27

28

29

30

31

32

33

34

36

37

38

39

40

41

42

43

44

45

46

48

49

50

51

52

53

54

55

56

57

58

0

1

2

3

4

5

6

7

8

9

10

12

13

14

15

16

17

18

19

20

21

22

1

2

3

4

5

6

7

8

9

10

11

13

14

15

16

17

18

19

20

21

22

23

January

February

March

April

May

June

July

August

September

October

November

Sunday

Monday

Tuesday

Wednesday

Thursday

Friday

Saturday

Sync and Apply

Webmin

Dashboard

Search

Webmin

System

Bootup and Shutdown

Change Passwords

Running Processes

Scheduled Cron Jobs

System Logs

Servers

Networking

Hardware

Refresh Modules

Change Password

Changing Unix user password

Changing password for root (root)

New password

.....

New password (again)

.....

☐ Force user to change password at next login?

☒ Change password in other modules?

Change

Return to user list

Webmin

Dashboard

Search

Webmin

System

Servers

Networking

FirewallD

Network Configuration

Hardware

Refresh Modules

root

Boot Time Interface Parameters

Name

ens160

Activate at boot?

☒ Yes ☐ No

IPv4 address

☐ No address configured

☐ From DHCP

☐ From BOOTP

Static configuration

IPv4 address

10.10.10.40

Netmask

255.255.255.0

Broadcast

☒ Automatic ☐ 10.10.10.255

IPv6 addresses

☐ IPv6 disabled

☒ From IPv6 discovery

☐ Static configuration

IPv6 address

Netmask

64

MTU

☒ Default ☐

Virtual interfaces 0 (Add virtual interface)

Save

Save and Apply

Delete and Apply

Delete

Webmin

Dashboard

Search

Webmin

System

Servers

Networking

FirewallD

Network Configuration

Hardware

Refresh Modules

root

DNS Client Options

Hostname

localhost.localdomain

☒ Update hostname in host addresses if changed?

Hosts file

DNS

Resolution order





Local hostname

DNS servers

10.10.10.1

Search domains

Save

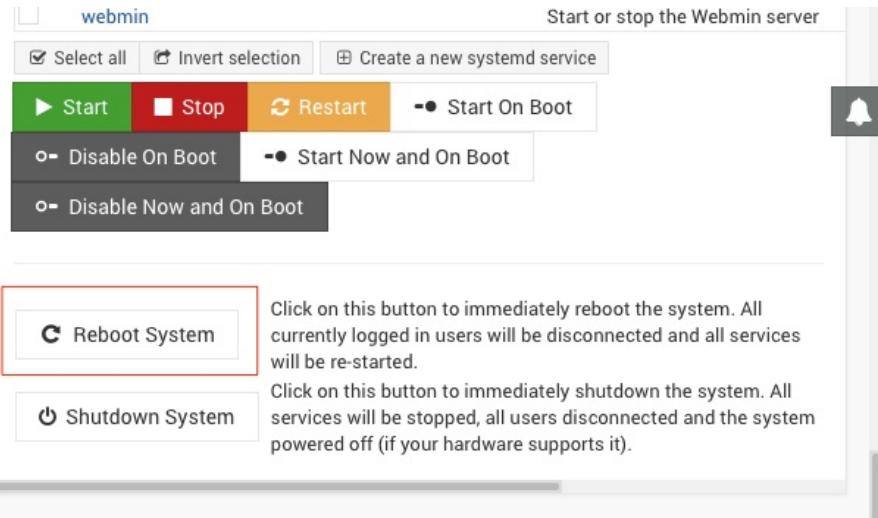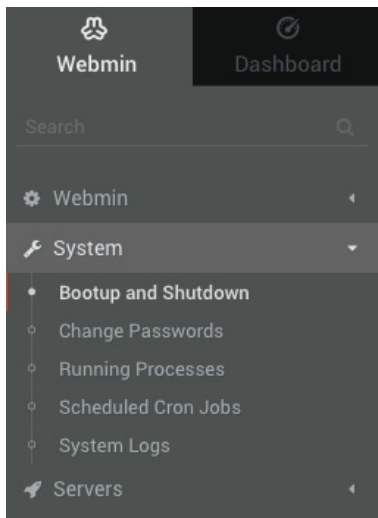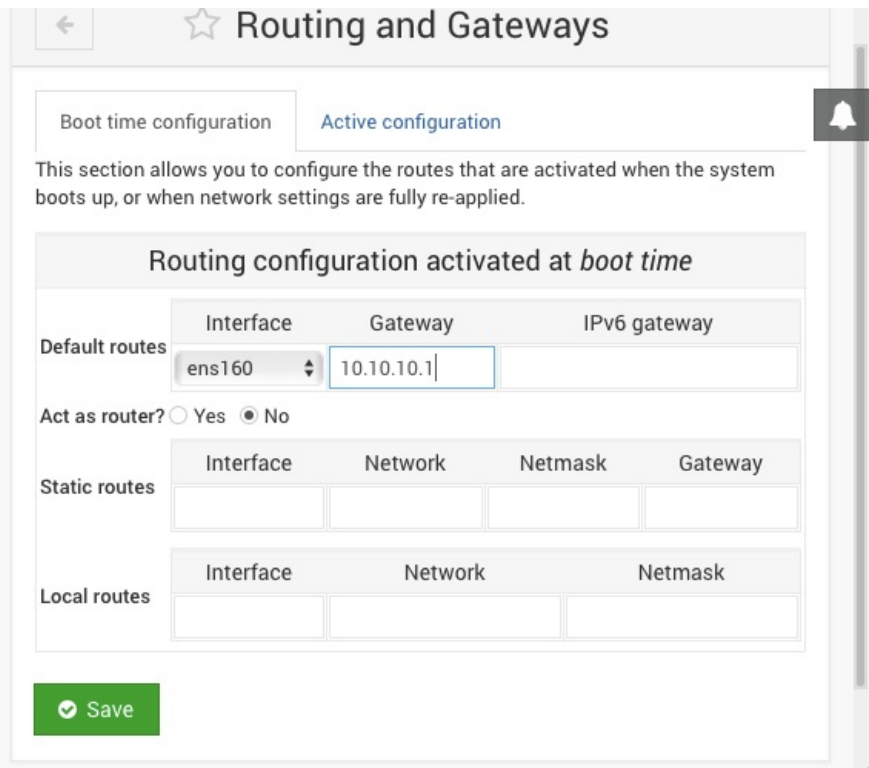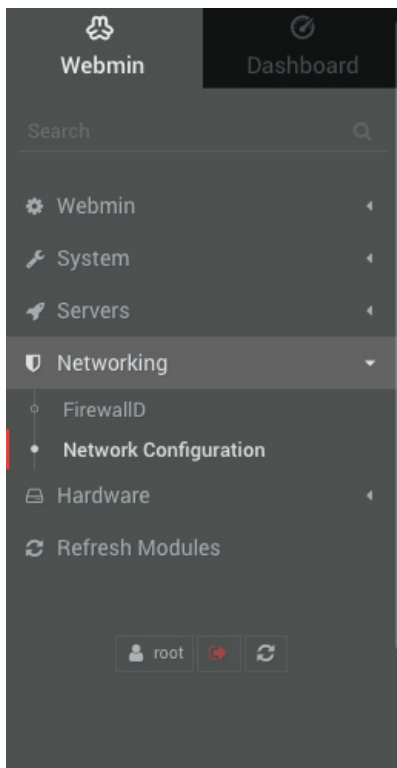

## Related Content

- [1. Installation and Setup](#)

🕒Revision #4

★Created 23 June 2023 16:55:21 by Josh Levitsky

✎Updated 19 March 2025 15:28:48 by Josh Levitsky