

# Editing Payloads / Payload Properties

## What

We can edit profile payloads in the WebAdmin, change payload properties for all other payload types and do some basic reporting in the Payload view.

## When/Why

Editing a profile is straightforward, but we can do more than that in the payload view. We can also change payload properties of any payload, and report on distribution (which is especially useful).

## How

Clicking on any payload will bring up a detail payload view:




The screenshot displays the FileWave Admin web interface. The top navigation bar includes the FileWave Admin logo, a refresh icon, 'Model Number: 78', a search bar for devices, and a user profile for 'TonyK'. The left sidebar contains navigation links: Go to Dashboard, Devices, Payloads (highlighted), Software Updates, Deployments, Sources, Reports, and Licenses. The main content area is titled 'FileWave\_macOS\_Client\_14.0.0\_38dbec200e' with a 'Priority' dropdown set to 'O'. Below the title are tabs for 'Payload Info', 'Devices', 'Platform Requirements', and 'Dependencies'. The 'Payload Info' tab is active, showing a 'Deployment' status of 80% Completed. A legend indicates: Completed: 4 (green), Remaining: 1 (blue), Warning: 0 (yellow), and Error: 0 (red). The 'Settings' section is divided into two columns. The left column contains 'Reboot Settings' with options for 'Requires Reboot' (including 'Authenticated restart for devices' and 'Reboot Message' with a rich text editor), 'Ignore Permissions on existing folders', and 'Verification Settings' (with radio buttons for 'Keep synched (self healing)', 'Download only if missing' (selected), and 'Do not verify', plus a checkbox for 'Do not overwrite existing files upon deployment'). The right column contains 'Kiosk' settings, including a 'Choose a Payload icon' section with a 'Browse' button and 'Supported filetype: .png', and a 'Title' field set to 'Optional'. A rich text editor for 'Description' is also present.

This view will differ a little depending on the type of payload. See below that a VPP payload shows licensing info that you won't see on other fileset types:



The Dependencies tab is where we specify relationships between payloads for simpler deployment.

For VPP payloads only you'll see a tab that shows licensing details

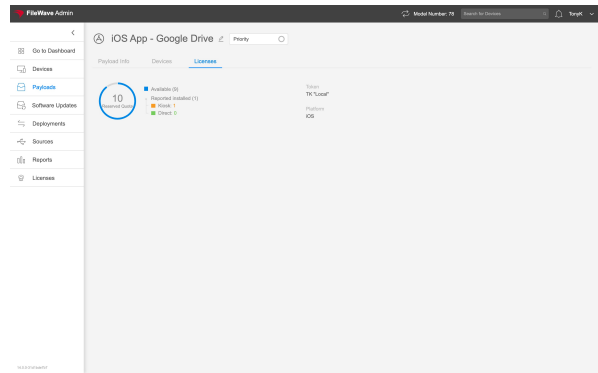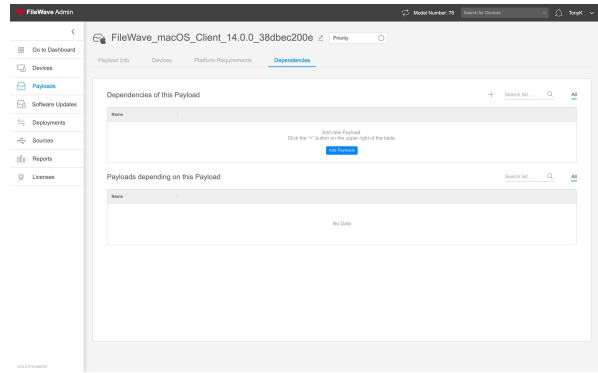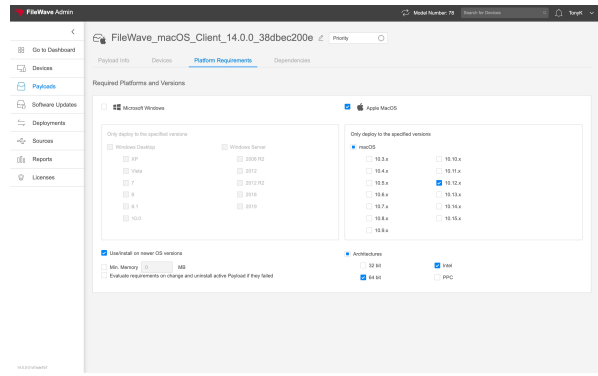

🔄Revision #2  
★Created 10 July 2023 22:45:17 by Josh Levitsky  
✎Updated 24 July 2023 14:01:31 by Josh Levitsky