

Editing Payloads / Payload Properties

What

We can edit profile payloads in the WebAdmin, change payload properties for all other payload types and do some basic reporting in the Payload view.

When/Why


Editing a profile is straightforward, but we can do more than that in the payload view. We can also change payload properties of any payload, and report on distribution (which is especially useful).

How

Clicking on any payload will bring up a detail payload view:

The screenshot displays the FileWave Admin web interface. The top navigation bar includes the FileWave Admin logo, a refresh icon, 'Model Number: 78', a search bar for devices, and a user profile for TonyK. The left sidebar contains navigation links: Go to Dashboard, Devices, Payloads (highlighted), Software Updates, Deployments, Sources, Reports, and Licenses. The main content area is titled 'FileWave_macOS_Client_14.0.0_38dbec200e' with a 'Priority' dropdown set to 'O'. Below the title are tabs for 'Payload Info' (selected), 'Devices', 'Platform Requirements', and 'Dependencies'. The 'Payload Info' tab shows a 'Deployment' status of 80% Completed, with a breakdown: Completed: 4, Remaining: 1, Warning: 0, and Error: 0. The 'Settings' section is divided into two columns. The left column contains 'Reboot Settings' (with options for 'Requires Reboot', 'Authenticated restart for devices', and 'Reboot Message') and 'Verification Settings' (with options for 'Keep synched (self healing)', 'Download only if missing' (selected), and 'Do not verify'). The right column contains 'Kiosk' settings (with a 'Choose a Payload icon' button and a 'Browse' button) and a 'Description' field. The bottom left corner of the interface shows the version '14.0.0-3161bde7b7'.

This view will differ a little depending on the type of payload. See below that a VPP payload shows licensing info that you won't see on other fileset types:



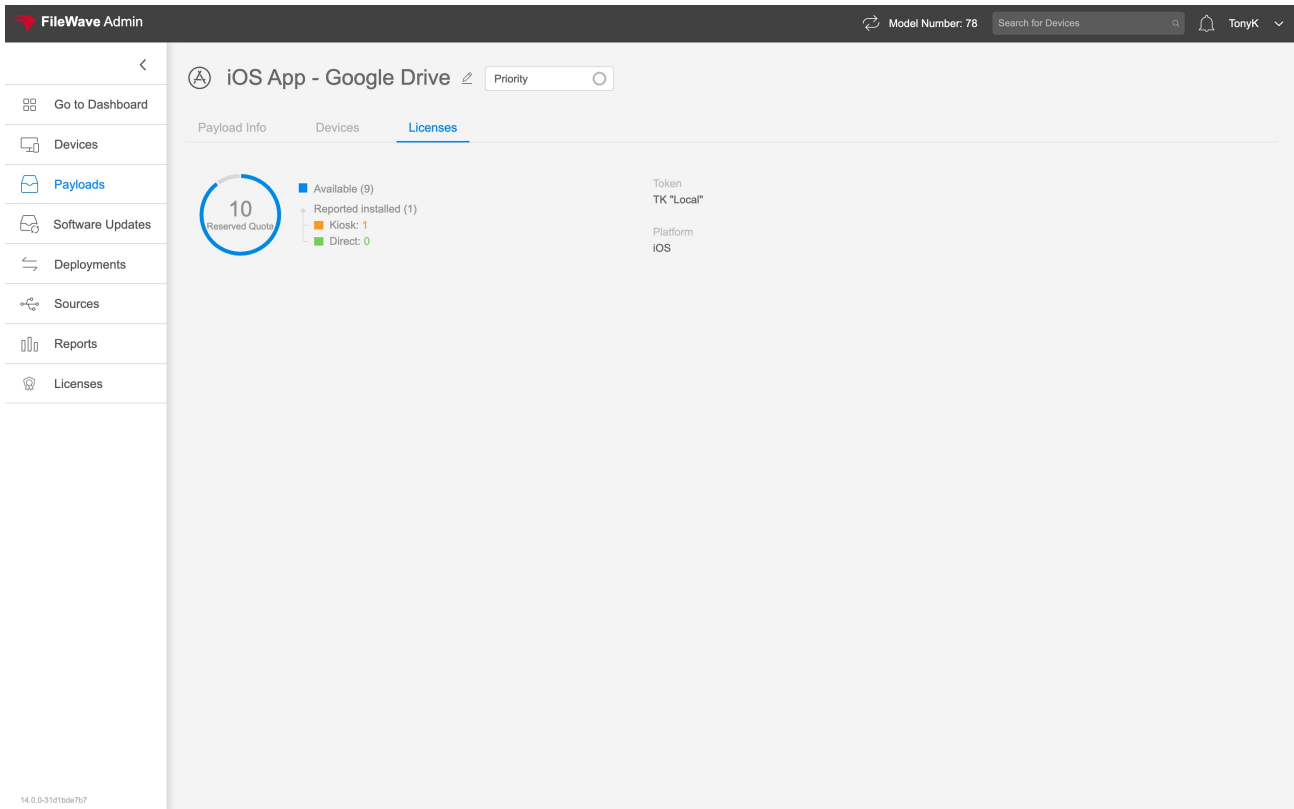


- ❗ You'll note that in payload properties there is no "Save" button. All changes made to payload properties (like platform requirements) are immediately saved, and will become effective on next model update.

Payload Tab	Example
<p>The Payload Info Tab shows:</p> <ul style="list-style-type: none"> Summary information on deployment Verification Settings Kiosk Icon Reboot flag 	<p>The screenshot shows the FileWave Admin interface for a macOS client payload. The 'Settings' tab is selected, showing options for Reboot Settings, Kiosk settings, and Verification Settings. The 'Kiosk' section includes a 'Kiosk Icon' and a 'Kiosk Name' field. The 'Verification Settings' section includes a 'Select at least one of the following options:' dropdown and a 'Download only if missing' checkbox.</p>
<p>The Devices Tab shows the devices that have this payload assigned, and their current status.</p>	<p>The screenshot shows the FileWave Admin interface for the same macOS client payload. The 'Devices' tab is selected, displaying a table of devices. The table has columns for Name, Payload Status, Browser, Deployment, Command, Size, and Model. The table lists several devices, including 'MacBook-Pro-15,4', 'MacBook-Pro-15,2', 'MacBook-Pro-15,3', 'MacBook-Pro-15,4', and 'MacBook-Pro-15,2', all with a status of 'Active'.</p>
<p>The Platform Requirements tab is where we specify on which platform the payload is provided.</p>	

The Dependencies tab is where we specify relationships between payloads for simpler deployment.

For VPP payloads only you'll see a tab that shows licensing details

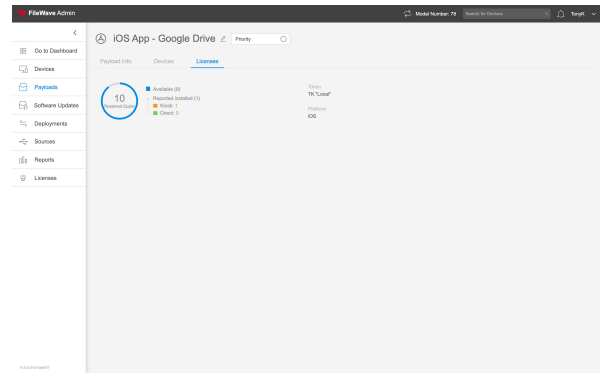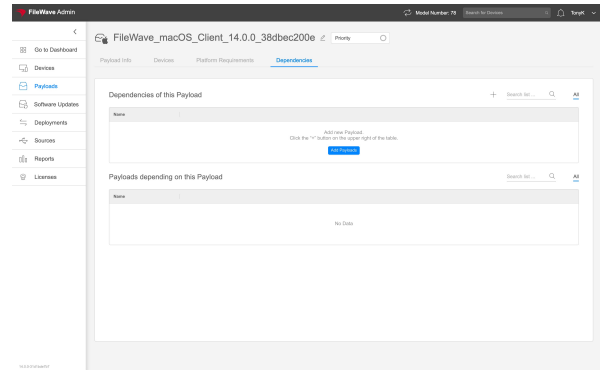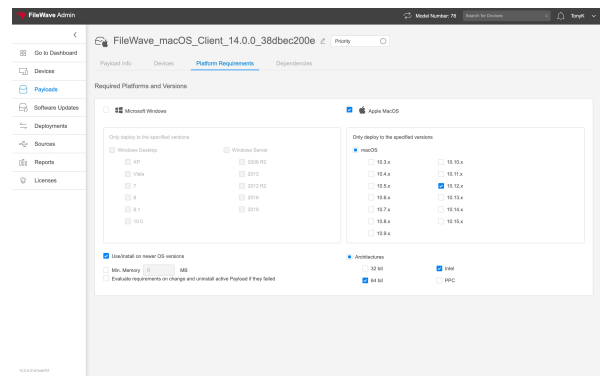

🔄Revision #2
★Created 10 July 2023 22:45:17 by Josh Levitsky
✎Updated 24 July 2023 14:01:31 by Josh Levitsky