

FileVault

- [FileVault - Getting Started](#)
- [FileVault 2 enabled on macOS ADE enrollment](#)

FileVault - Getting Started

Please Note

- Setting up FileVault 2 with FileWave is supported with MDM enrolled macOS devices only! MDM enrolled devices are such that went through DEP enrollment or had the MDM profile installed manually.

These advanced steps are for system administrators and others who are familiar with the command line and FileWave.

What you need to begin

- FileWave version 12.9+
- macOS 10.9+ MDM enrolled in FileWave
- macOS devices have to be MDM enrolled in FileWave

What is FileVault 2

FileVault full-disk encryption (FileVault 2) uses XTS-AES-128 encryption with a 256-bit key to help prevent unauthorized access to the information on your startup disk.

FileVault 2 has three different decrypting mechanisms:

- If a user is a part of "FileVault users", successful login unlocks FileVault
- A Personal Recovery Key (PRK) can be generated for each user and used to unlock FileVault
- An Institutional Recovery Key (IRK) - which is actually a cryptographic key pair - can be used to unlock FileVault

Setup

Full Disk Encryption Assistant

- Open the FileWave Admin
- Assistants → Full Disk Encryption Management → FDE Configuration Management...

The screenshot shows the 'Full Disk Encryption Configuration Management' window. On the left, there is a table with 4 configurations. The first configuration, 'Configuration', is selected and highlighted in blue. It has a red badge with the number '1' next to it. The table has columns for 'Name' and 'Type'. Below the table are buttons for '+', '-', and 'Duplicate'. On the right, the 'Details' panel for the selected configuration is shown. It includes fields for 'Name' (display name for the disk encryption configuration) and 'Description' (description for the disk encryption configuration). Below these is a 'Recovery Key Type' dropdown menu set to 'Personal and Institutional'. Underneath is the 'Institutional Recovery Key' section, which includes a button to 'Upload Institutional Recovery Key' and a red message stating 'Missing Required Recovery Key'. At the bottom right of the window are 'Cancel' and 'Save' buttons.

Name	Type
Configuration	Personal and Institutional
Default FileVault	Personal
Institutional	Institutional
Test IRK	Institutional

Details

Name
Display name for the disk encryption configuration

Configuration

Description
Description for the disk encryption configuration

Recovery Key Type
Type of recovery key to use for the disk encryption configuration

Personal and Institutional

Institutional Recovery Key
Recovery key file for the institutional recovery key

Upload Institutional Recovery Key Missing Required Recovery Key

Cancel Save

- Once you click the "+" on the bottom left you will then be able to select the recovery key type on the right
 - Personal (PRK): This will prompt the user their "FileVault Recovery Key" that the end-user will need to keep for decryption (FileWave will be able to escrow this key later)
 - Institutional (IRK): A key will need to be created on your macOS device and then imported into the Disk Encryption Configurations window. Please follow the steps below

▼ Institutional Key Creation and Import


Create an IRK keychain using the following command

```
sudo security create-filevaultmaster-keychain ~/Desktop/FileVaultMaster.keychain
```


- Unlock the keychain

```
security unlock-keychain ~/Desktop/FileVaultMaster.keychain
```


- Open Keychain Access Utility and Add (File > Add) the keychain you just created above

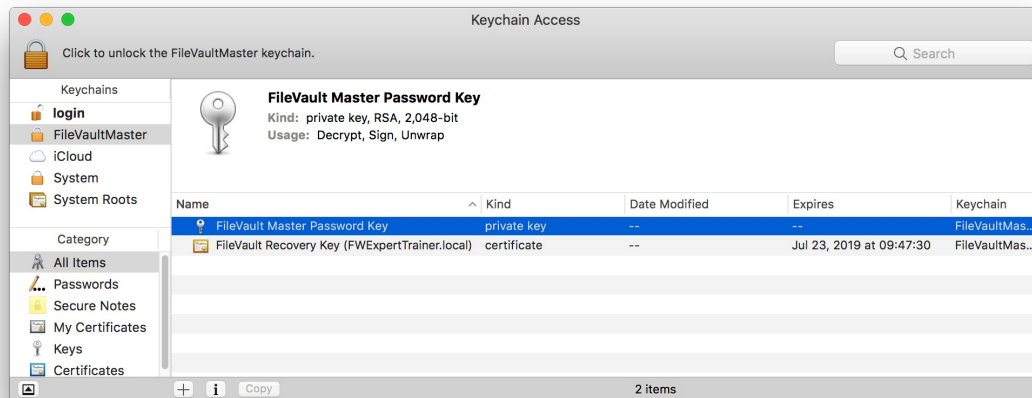

- Select the keychain you just added - it should contain both certificate and private key; select both and export both as .p12 file - protect the file with a password

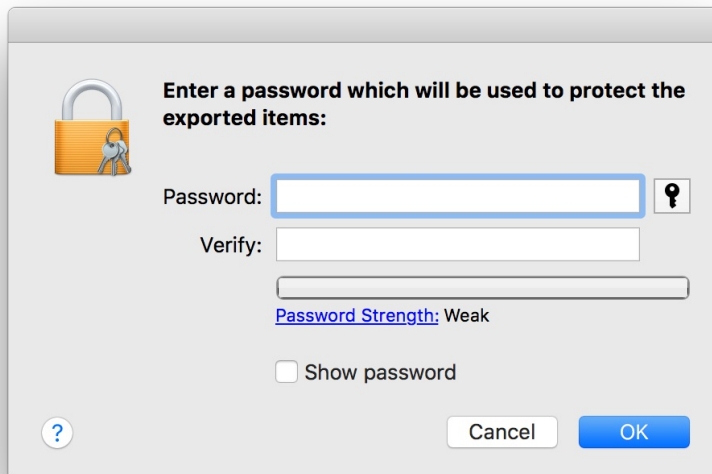

- Back in the Disk Encryption Configurations window upload the p12 key you just created.

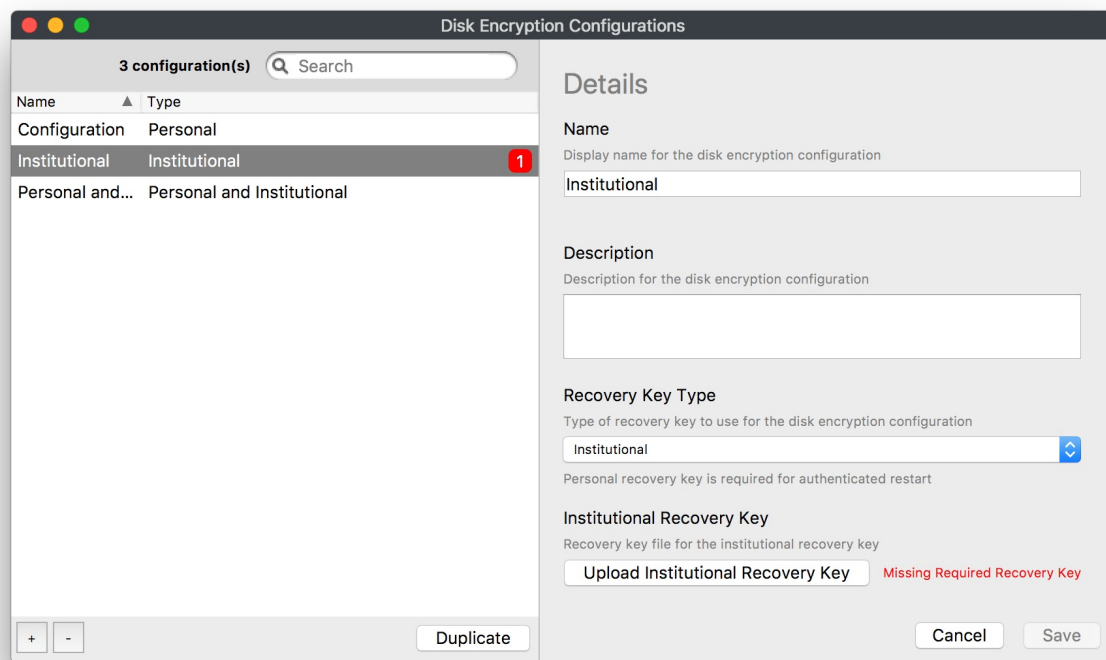


- Personal and Institutional (IRK and PRK): Provides the end user a personal key and the institutional key can be used as well
- Save


Disk Encryption Profile

Next, we will need to set up the Apple Profile that will configure and set up FileVault 2. Again your devices need to be MDM enrolled for this payload.

- Go to Filesets → New Desktop Filesets → Profile
- Once in the Profile Editor you will need to Fill out the General Payload then configure the Disk Encryption

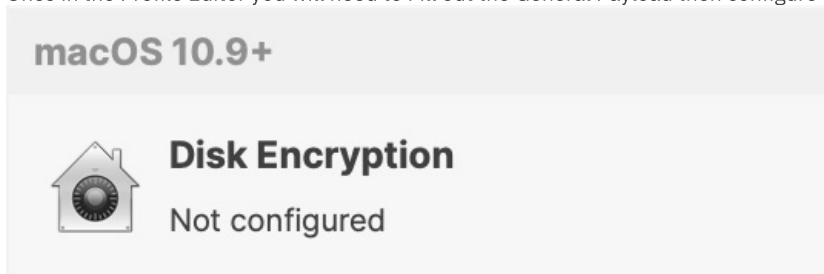

- Now is the time to configure your FileVault 2 payload
If you are using the Escrow Personal Recovery Key you are required to put a description in the Escrow Location Description (macOS 10.13+) pane. This description can be informing the user where the key gets stored by default, which is /var/db/FileVaultPRK.dat. Or the description can be letting the user know to contact the technology department for more information.

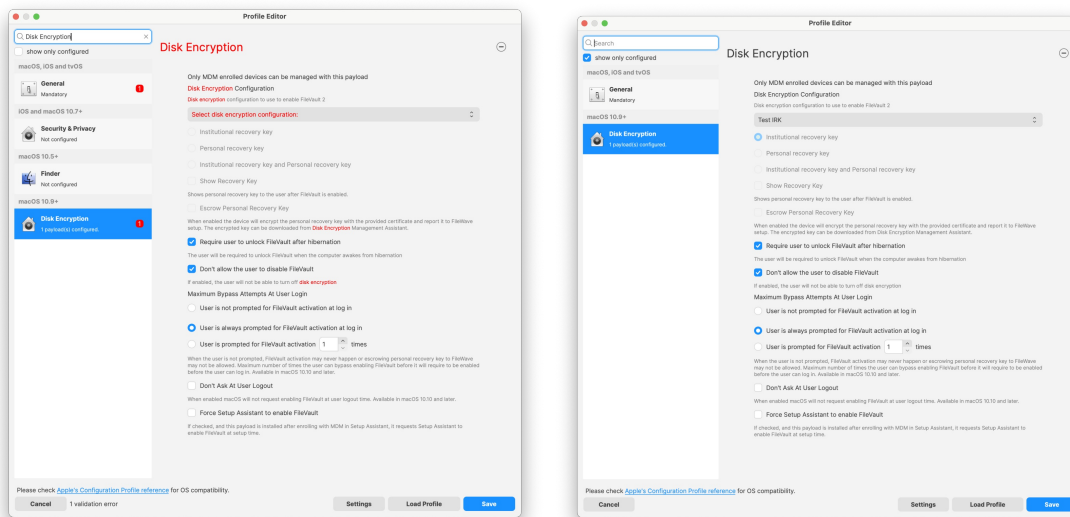

IMPORTANT NOTE:


- * If you use the option "User is not prompted for FileVault activation at login" There is a chance that FileVault may never fully activate. It is recommended you do not use this option.
- * This payload can't be used in conjunction with other payloads in the same profile.
- * Importing a profile with FileVault 2 options is not possible; FileVault 2 configuration must be created using the Assistant and Full * Disk Encryption payload; if you try to import such profile FileWave will have to remove FDE payloads before importing - FileWave can do it for you.
- * If you had FDE payloads before upgrading to FileWave 12.9+, you won't be able to edit those profiles unless FileVault 2 options are removed - FileWave can do it for you.
- * Escrow Personal Recovery Key is required for Authenticated Restart and being able to store the key in FileWave.

- From this point, you are ready to deploy this profile to your MDM enrolled macOS devices.

Disk Encryption Inventory Information

Now that you have FileVault 2 enabled on your device(s) you can view inventory pulled from the device(s) regarding the FileVault 2 settings:

- FDE Has Institutional Recovery Key
- FDE Has Personal Recovery Key
- FDE Is Enabled
- FDE Support
- Authenticated restart supported
- FDE Personal Recovery Key Hint Message
- Has FileWave recovery Key

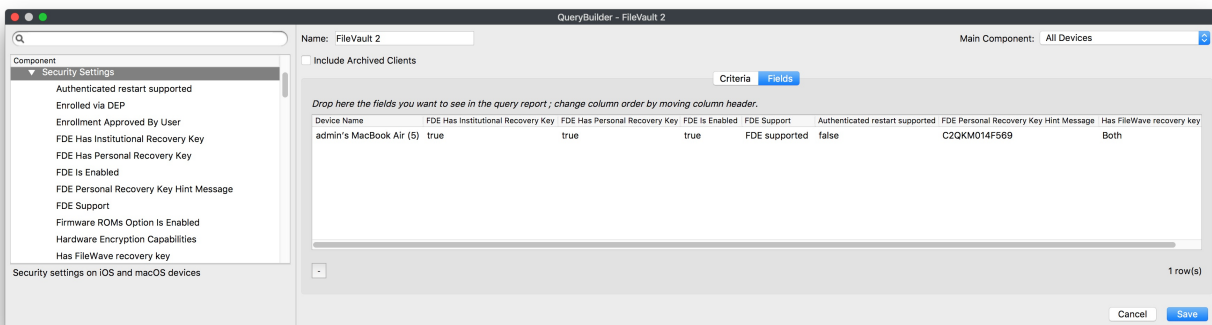

Disk Encryption Recovery Key Escrow

When FileVault 2 is enabled FileWave will keep track of the configuration applied to the corresponding keys such as the Institutional Recovery Key (IRK) used to encrypt the disk and the Personal Recovery Key (PRK).

To manage these keys go to Assistants → FDE Recovery Key Management...

Once you select a device you will be able to Show Personal Recovery Key... or Download Institution Recovery Key... depending on what configuration was used to set up FileVault on that machine.

You can also delete outdated entries but keep in mind if a device has FDE managed by FileWave, it's not possible to remove FDE keys

from the assistant. You have to disable FDE or remove the device from FileWave first.



Serial Num	FileWave Client Name	In FileWave	Configuration Name	Configuration Type	Last Update	PRK Available	IRK Available	Status	PRK Status
C2QKMO...	admin's MacBook Air ...	true	Personal and Institutional	Personal and Institutional	7/27/18 06:30	true	true	Enabled	Valid

Status can be:

- Disabled
- Enabled
- Pending - this is the state reported by a device between the profile installation and when FDE actually being enabled

PRK Status can be:

- Valid
- Cannot decrypt
- Invalid - no key or not a valid key

Authenticated Restart

macOS 10.13 NOT SUPPORTED


- ❗ Authenticated restart using Personal Recovery Key does not work on macOS 10.13+ on APFS
This option is for Personal Recovery Key only; Institutional Keys are not supported with this option

When FileVault 2 is enabled, the device will be locked on startup. At this stage, FileWave does not connect to the device until the drive is unlocked. You need to be aware of this if you have FileVault 2 enabled on a device and then send out a Fileset that requires a reboot! After the reboot, the end-user will have to unlock the drive before the deployment can finish.

FileWave may be able to help with this using Authenticated Restart as a Fileset option. If you selected the option Escrow Personal Recovery Key when you created the Disk Encryption Profile to enable FileVault 2 then FileWave will be able to use the authenticated restart to unlock the drive without user interaction.

This option is located in the Fileset Properties for any Fileset you are requiring a reboot for.

Right-click on Fileset → Properties → Select Requires Reboot

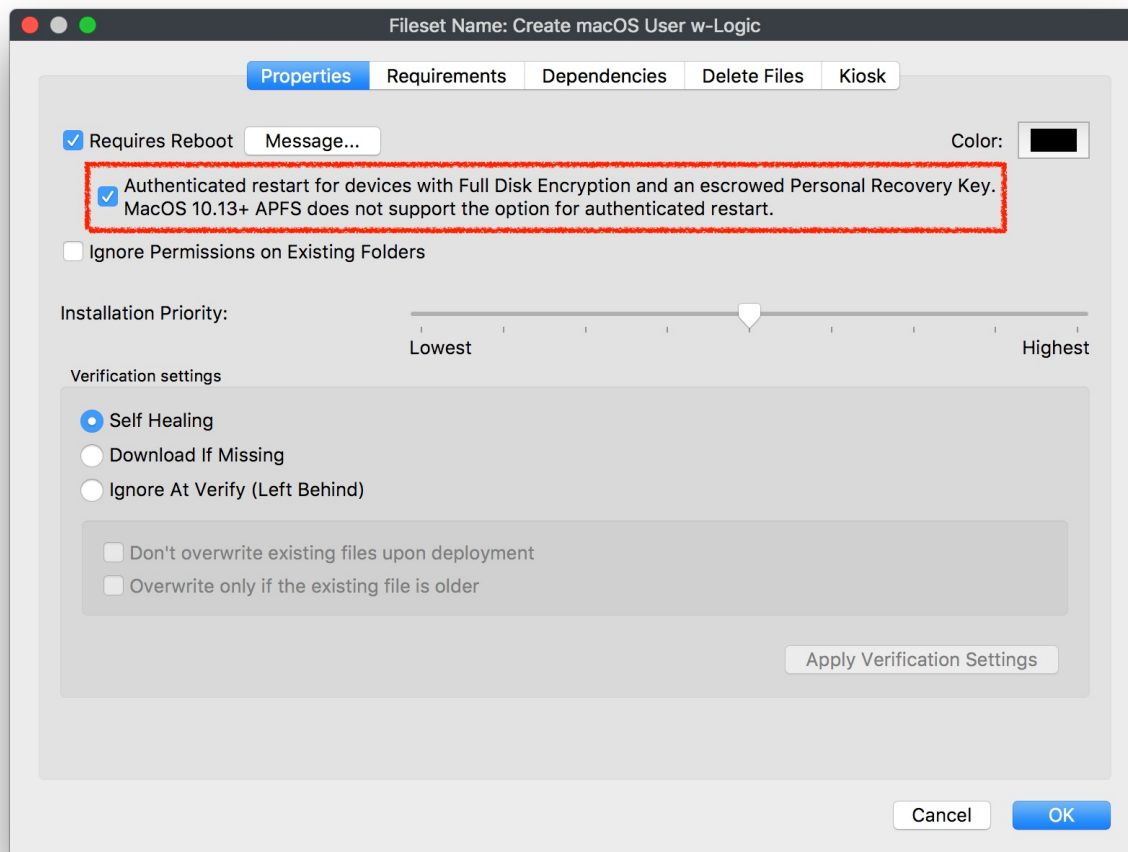

Possible Security Risk

- Keep in mind using this option can be seen as a security risk and should be used accordingly. The device will reboot unlocked so access to encrypted data is possible and until the device reboots, an escrow key is stored in memory but still encrypted.

Recent versions of macOS for FileVault IRKs

The use of Institutional FileVault keys, also known as Institutional Recovery Keys (IRK), is no longer recommended in recent versions of macOS, including macOS Ventura. The utility of IRKs for organizations has become limited, particularly on Macs with Apple Silicon, where IRKs provide no functional value. This is because IRKs can't be used to access recoveryOS, and because Target Disk Mode is no longer supported, the volume can't be unlocked by connecting it to another Mac.

Instead, the use of a Personal Recovery Key (PRK) is now recommended. A PRK provides an extremely robust recovery and operating system access mechanism, unique encryption per volume, escrow to MDM, and easy key rotation after use.

Moreover, there is only one PRK per encrypted volume. During FileVault enablement from MDM, the PRK can optionally be hidden from the user. When configured for escrow to MDM, MDM provides a public key in the form of a certificate, which is then used to asymmetrically encrypt the PRK in a CMS envelope format. The encrypted PRK is returned to MDM in the security information query, which can then be decrypted for viewing by an organization. Many MDM vendors provide the option to manage these keys to allow for viewing directly in their products. MDM can also optionally rotate PRKs as often as is required to help maintain a strong security posture—for example, after a PRK is used to unlock a volume.

- Additional information managing FileVault in macOS: [Managing FileVault in macOS](#)
Information regarding recent versions of macOS managing FileVault: [Manage FileVault with mobile device management](#)

Related Content

- [Bootstrap Token Management on macOS](#)
- [Deprecation of Institutional Recovery Keys](#)

FileVault 2 enabled on macOS ADE enrollment

What


Once you have started down the road of using FileVault to secure your data with [FileVault - Getting Started](#) then you may want to think about enabling FileVault at enrollment time for macOS systems.

When/Why

FileVault is a built-in encryption solution for macOS devices that will protect your data at rest. Think about a laptop issued to a Teacher or a Financial person and what would happen if that laptop was stolen. What data would be on it? Enabling FileVault is very simple, and adds some peace of mind. As of FileWave 15.2.0 and macOS 14.0 there is now an option available to enable FileVault from enrollment time.

How

Once you have gone through [FileVault - Getting Started](#) to understand how it is configured, and you are running at least FileWave 15.2.0 with devices that are at least macOS 14.0 then you can go to FileWave Central: Assistants -> DEP Association Management and make a profile with the below option enabled of "Force Setup Assistant to enable FileVault". Note that you will not be able to enable the option until you have created a profile that configures FileVault, but if you have gone through the [Getting Started](#) guide then you should have this created.

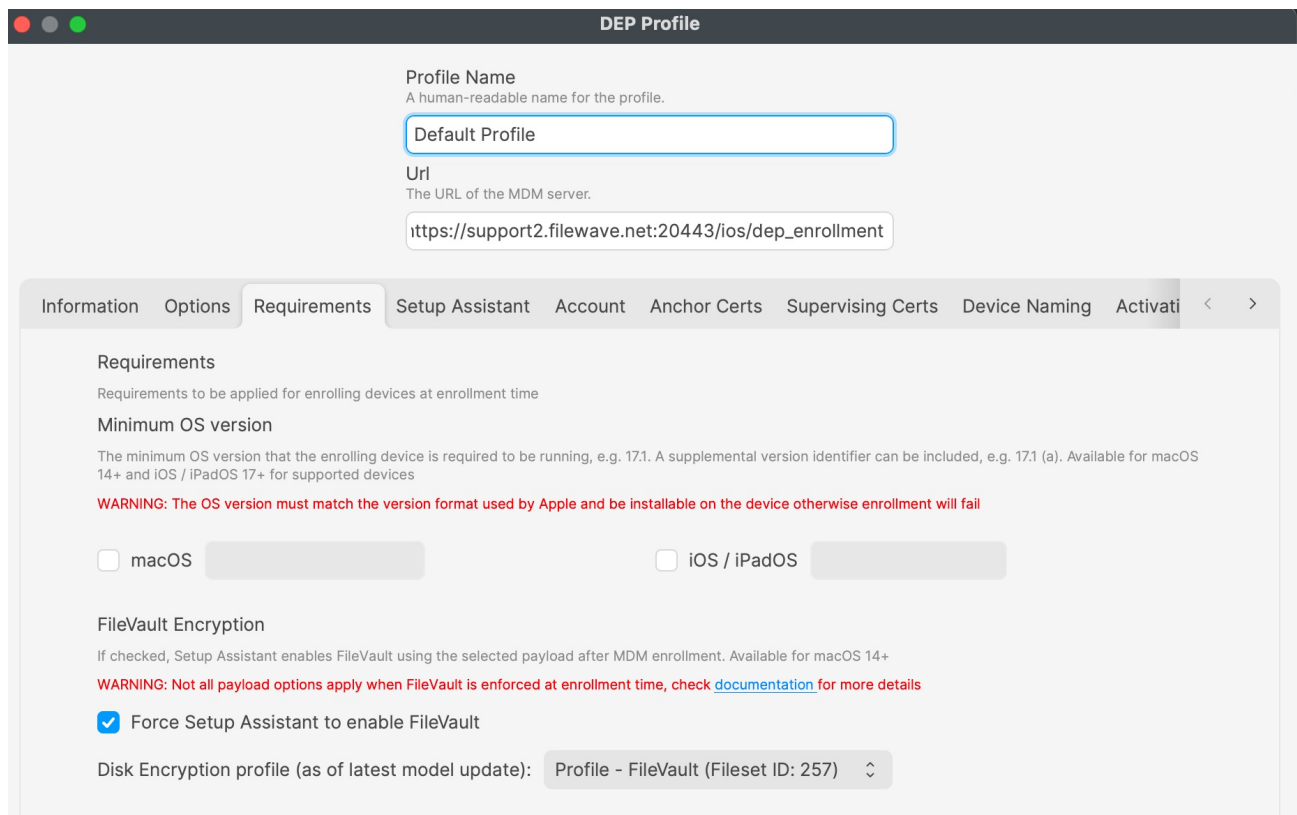

The screenshot shows the 'DEP Profile' configuration window. The 'Profile Name' is 'Default Profile' and the 'Url' is 'https://support2.filewave.net:20443/ios/dep_enrollment'. The 'Requirements' tab is selected, showing options for 'Minimum OS version' and 'FileVault Encryption'. The 'FileVault Encryption' section has a checkbox for 'Force Setup Assistant to enable FileVault' which is checked. The 'Disk Encryption profile' is set to 'Profile - FileVault (Fileset ID: 257)'.

DEP Profile

Profile Name
A human-readable name for the profile.
Default Profile

Url
The URL of the MDM server.
https://support2.filewave.net:20443/ios/dep_enrollment

Information Options Requirements Setup Assistant Account Anchor Certs Supervising Certs Device Naming Activation

Requirements
Requirements to be applied for enrolling devices at enrollment time

Minimum OS version
The minimum OS version that the enrolling device is required to be running, e.g. 17.1. A supplemental version identifier can be included, e.g. 17.1 (a). Available for macOS 14+ and iOS / iPadOS 17+ for supported devices
WARNING: The OS version must match the version format used by Apple and be installable on the device otherwise enrollment will fail

☐ macOS ☐ iOS / iPadOS

FileVault Encryption
If checked, Setup Assistant enables FileVault using the selected payload after MDM enrollment. Available for macOS 14+
WARNING: Not all payload options apply when FileVault is enforced at enrollment time, check [documentation](#) for more details

☒ Force Setup Assistant to enable FileVault

Disk Encryption profile (as of latest model update): Profile - FileVault (Fileset ID: 257)

Once you have this enabled then you should be all set. Make this enrollment profile either the default or just assigned to specific devices. We always recommend testing things on one device first to be sure you are happy with the options, and to test your Institutional Recovery key to make sure it works with the password you believe it should.

Related Content

- [FileVault - Getting Started](#)
- [Deprecation of Institutional Recovery Keys](#)